


低净空隧道复合绝缘子 Low Headroom Tunnel Composite Insulator

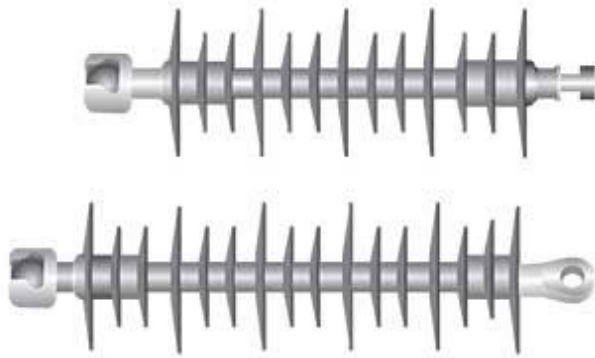

低净空隧道复合绝缘子主要尺寸与特性

Main Dimension and Characteristics of Low Headroom Tunnel Composite Insulator

Serial Number 序号	Product Type 产品型号	Specified Voltage 额定电压	Specified Mechanical Tension/Failing Load 额定机械负荷/破坏负荷	Section Length 绝缘长度	Min Insulation Distance 最小绝缘距离	Min creepage Distance 最小爬电距离	Lightning Impulse Withstand Voltage/Peak Value) 雷电冲击耐受电压	Artificial pollution Power Frequency Withstand Voltage (Salt Deposit Density) (Std:0.05mg/cm ²) 人工污秽耐受电压	Power Frequency Withstand Voltage Test - Wet 工频耐受电压
		kV	kN	H mm	h mm	L mm	kV	kV	kV
1	FQX-25/70	25	70	450	350	1200	180	28	76
2	FQX-25/100	25	100	530	430	1600	270	32	130
3	FQX-25/70	25	70	584	400	1600	220	30	100
4	FQXS-25/70	25	70	584	380	1400/145	220	30	100
5	FQXS-25/120	25	120	600	430	1600	270	32	130

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.